ATC
MIDDLE EAST FZCO

رفيد
شـاشـة ل.ي.د

rafeed
LED SCREEN

Mary Turnkey solutions for media displays..

Mary

All new Digital Poster
Indoor series: P2.5/P1.9

Thickness: 35mm
5mm ultra slim edge design
Whole front maintenance
Aluminum integrated frame
Hidden aute-closing inclined braket

- Frame size: 527x1902mm
- Display size: 560x1890mm
- Module size: 280x210mm
- Pixel pitch:205mm, 109mm
- Display mode: synchronized / asynchronous system
- Signal outpt: network cable (RJ45)
- Cross-platfrom operation: Windows/IOS/android
- Contorl pattern: network /WIFI/3G/USP
- Brightness: P2.5(800nit); P1.9(800nit)
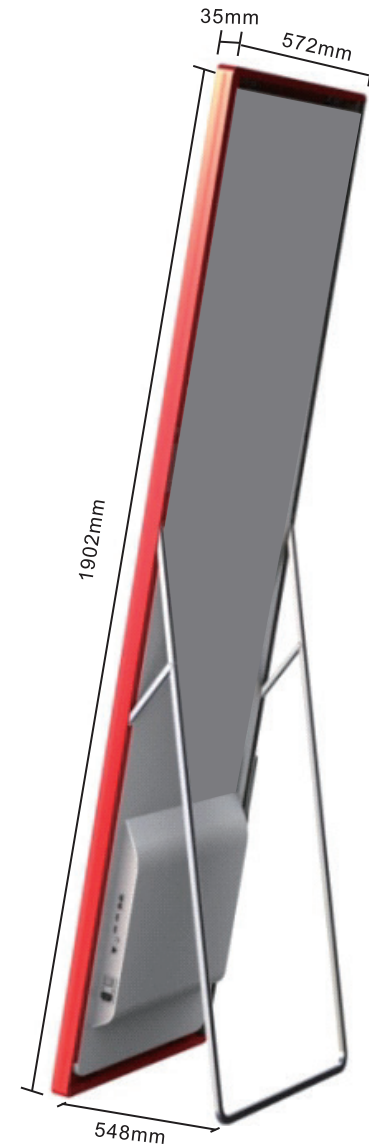- Super light design, weight: 32Kg/ set

rafeed
LED SCREEN

Mary

MODEL	Indoor series	
MODEL	**P2.5**	**P1.9**
LAMP		
LED Type	SMD(2020)	SMD(1010)
Item code	PR-SC-Mar2.5-08	PR-SC-Mar1.9-09
MODULE		
Pixel pitch	2.5mm	1.944mm
LED module size	210x280mm	210x280mm
Resolution(H×W)	84x112	108x144
LED driving method	1/28 dynamic scan	1/27 dynamic scan
CABINET		
LED module layout(H×W)	9x2	9x2
Resolution(H×W)	756x224	972x288
Display area	1.06m²	1.06m²
Cabinet size)	1902×572×35mm	1902×572×35mm
Net. Weight/set	32Kg	32Kg
Ingress Protection	Front IP40/Rear IP40	Front IP40/Rear IP40
Power	AC 240/100±10%	AC 240/100±10%
Serviceability	Front service	Front service
DISPLAY		
Max.Power consumption/cabinet	500W	650W
Avg.Power consumption/cabinet	150W	195W
Viewing Angle(H/V)	160°/160°	160°/160°
Brightness	800cd/m²	800cd/m²
Pixel density(pixel/cabint)	169.344	279.936
Contrast ratio	4.000;1	4.000;1
Temperature/ Humidity (Operation/Storage)	-10°C to +40°C; 10% to 90%	-10°C to +40°C; 10% to 90%
Lifetime(50% brightness)	80,000hours	80,000hours
Processing	16bit	16bit
Colors	281trillion	281trillion
Refresh rate	≥2880Hz	≥2880Hz
Frame rate	60fps	60fps
Brightness level	Manually/Auto/Programmable	Manually/Auto/Programmable

رفيد
شاشة ل.ي.د

HD Image Quality

- 2.5mm/1.9mm HD image quality
- Refresh rate up to 3840HZ
- Brightness at 800nits, 3 times brighter than LCD display
- 160° view angle
- High color reproduction
- Compared with indoor LCD poster, with high brightness, super thin & low-Power consumption, it is also suitable for bright occasion

35mm

572mm

1902mm

548mm

rafeed®
LED SCREEN

Synchronized/ Asynchronous Systen
Plug and Play, Cross-Platform Operation

Free play at anytime, anywhere

Real time play by connecting to network

the screen can be controlled with fixed portable windows

IOS & android devices

the content can be refreshed and stored in built-in

media player through WIFI or USB to

achieve asynchronous play

Windows OS

Android OS

iOS

Networking Integrated Management

- Play the video by connecting to HDMI, USB or cable
- Multi-screen cascade, unified playing and management
- After networking, it can push notification and control displays wordwide

Stand-alone mode   Multi-screen cascade   Mirror mode   Multi-screen mode

Multi-Installation

Suitable for lifting, wall-mounted, floor-standing and creative installation like inclined strut installation

Multi-Installation

Applied in shopping all, meeting room, control, airport, station, super market, canteen and restaurant.
can be used as;

- Advertising platform
- shopping guide information, supporting service information release

- Urgent information, instant message release
- Publicity platform, brand model window

Multi screen assembly 16:9

www.rafeed.co

Package & Delivery

Oxford cloth and reflective tape:
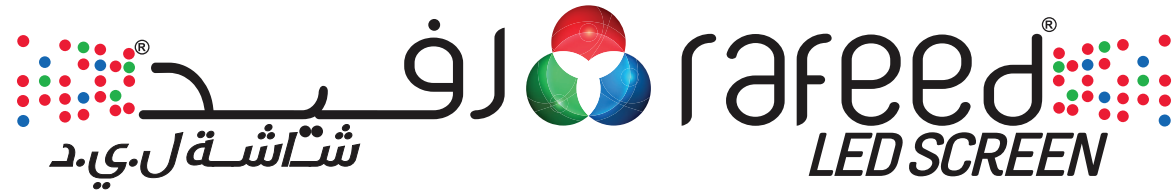Applicable in small amount displays and short distance delivery

Wooden case:
Applicable in fixed installation and long or short disrance delivery

Flight case:
Applicable For rentak display and long or short disrance delivery

rafeed
LED SCREEN

شـاشـة ل.ي.د رفيـح